




Williams  
Professional Refrigeration

# Beverage Counter Series

Drinks display and storage are essential to catering,  
Williams provides ranges of equipment  
to facilitate your business

# Bottle Cooler Key Features

Designed for stylish, effective storage and display of bottles and cans for easy customer selection

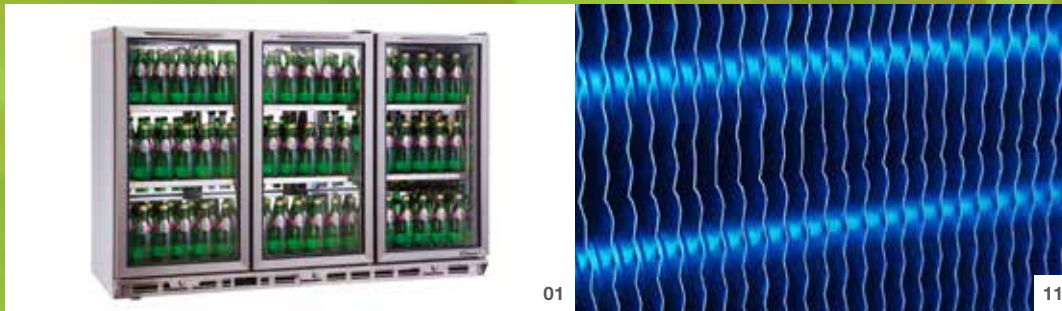

01. Fitted with anti-condensation double glazed Argon gas glass door with aluminium alloy frame
02. Bright low energy LED with on / off switch for excellent product display and easy customer selection
03. Engineered with hidden condensing unit to fit with interior design and minimising the requested installation space
04. Fully adjustable perforated 304 grade stainless steel shelves. Accommodates a vertical stacking capacity of three or six levels of 10" bottles
05. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)
06. Removable magnetic door gasket with air release points provides an excellent seal to prevent heat ingress
07. BC1, BC2 and BC3: 10Hmm levelling feet at front to ensure stability on an uneven floor and 15Hmm castors at rear
08. BC95 and BC200: 10Hmm levelling feet to ensure stability on an uneven floor
09. Forced air refrigeration system ensures effective air circulation
10. Imported, durable and energy-efficient compressor
11. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
12. Accurate helium leak detection system ensures the quality of the entire refrigeration system
13. Automatic defrost ensures the evaporator working to its optimum performance
14. Automatically vaporises defrost water, drainage is not required
15. Designed and engineered to operate up to 32°C ambient
16. Environmental-friendly CFC-free refrigerant (R134a)
17. HACCP compliant

# Bottle Cooler

## Specification

- Foodsafe 304 grade stainless steel exterior and 304 grade BA mirror stainless steel interior
- Galvanised steel exterior back and base
- Fitted with cylindrical lock

## Options

1. 304 grade stainless steel exterior back / base
2. Black colour bond exterior / back
3. 15mm thick table top for hidden the door hinge screw \*
4. 304 grade stainless steel door
5. Left-hand-side door hinge
6. Additional shelving / shelf supporters
7. 220V / 60HZ / 1PH

\* Available for BC1SS, BC2SS and BC3SS only



# Bottle Cooler Product List

**BC1SS**



**BC2SS**



**BC3SS**



**BC95SS**



**BC200SS**





# Bottle Cooler Technical Data

Model	BC1SS / BC1SS-U	BC2SS / BC2SS-U	BC3SS / BC3SS-U	BC95SS	BC200SS
<b>Temp Range (°C)</b>	+4 / +10	+4 / +10	+4 / +10	+4 / +10	+4 / +10
<b>External Dimension (mm)</b>					
Width	600	900	1352	645	1290
Depth (including 27mm rear bracket)	530			635	
Height	895 800 (-U)			1770	
<b>Internal Dimension (mm)</b>					
Width	530	830	1310	545	1190
Depth	378			460	
Height	745 650 (-U)			1554	
<b>Thickness of 304 grade stainless steel (mm)</b>					
Exterior	0.7				
Interior	0.7				
<b>Opening Depth</b>	1073	923		1254	
<b>Capacity (cu.ft / litres)</b>	5.3 / 152 4.5 / 130 (-U)	8.4 / 238 7.2 / 204 (-U)	13 / 368 11.1 / 315 (-U)	14.5 / 412	31.7 / 899
<b>Capacity (cans @ 330ml)</b>	122	204	309	266	558
<b>Power Supply</b>	220V / 50HZ / 1PH				
	13 amp plug				
<b>Power Input - Running (amps) *</b>	2		3.5	2	2.28
<b>Rating Power (watts) *</b>	440		770	440	502
<b>Compressor (HP)</b>	1/5		1/4	1/5	1/4
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>	287		485	287	485
<b>Refrigerant</b>	R134a				
<b>Standard fittings</b>					
Stainless steel perforated shelves	2		6		12
Shelf supporters	8	10	24		48

\* 20% increase for 60HZ power supply